

#### Optional: Retrieve a voicemail message

1. Press the **"Message"** key (5) when the handset is showing a red light (2)
2. Scroll down to 8201 and press ok
3. Enter the password for your voicemail (Default: 1188)
4. Listen to the message, then follow the prompts to save, delete or replay message

#### Optional: Record a greeting

1. Press the **"Message"** key (5)
2. Scroll down to 8201 and press ok
3. Enter the password for your voicemail (Default: 1188)
4. Choose "Mailbox Options" ("0"),
5. Press "1" to record the Night greeting or press "2" to record the "Day" greeting. After recording, press "1" to activate the recorded greeting.

## Quick Reference Guide for Cordless Phone




Detailed user manuals are available at

<http://www.telequip.net/Services/TQMS.php>

For support, call our support team at 07 4047 7088 or

email [service@telequip.net](mailto:service@telequip.net)

October 2017

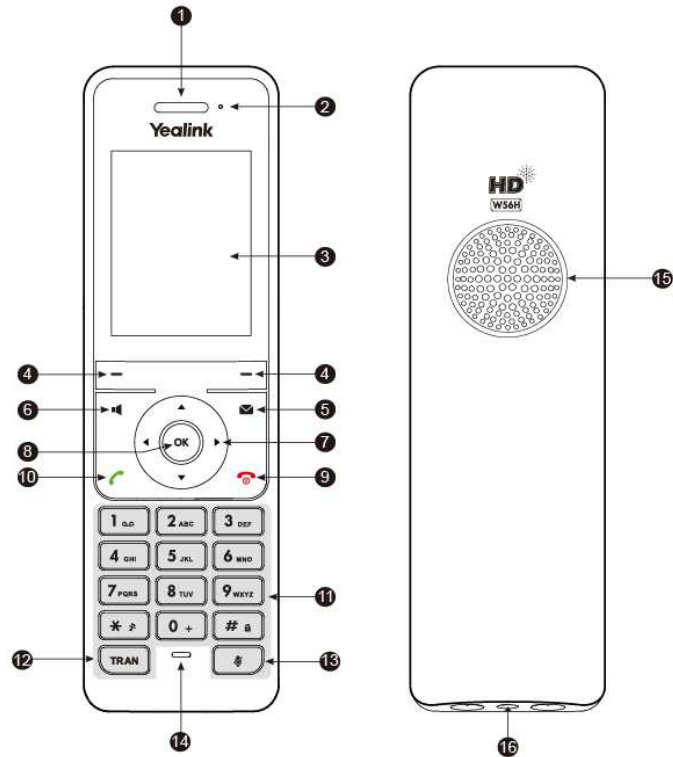

- |                               |                           |
|-------------------------------|---------------------------|
| 1 Earpiece                    | 9 "On hook" / "Power" key |
| 2 Power Indicator LED         | 10 "Off hook" key         |
| 3 LCD screen                  | 11 Alphanumeric keypad    |
| 4 Programmable keys           | 12 "TRAN" key             |
| 5 "Message" key               | 13 "Mute" key             |
| 6 "Speakerphone" key          | 14 Microphone             |
| 7 Scroll keys                 | 15 Speaker                |
| 8 "Ok" key to confirm actions | 16 3.5mm earphone jack    |

## Survival Functions

### Make a call

1. Dial the number you want to call  
For internal calls, dial the extension number, for example "8201"
2. Press the "Off hook" key (10)

### Receive a call

When the phone rings,

1. Press the "Off hook" key (10) or
2. Press the "Speakerphone" key (6)

### Transfer a call

1. Press the "TRAN" key (12)
2. Dial the extension you want to call, for example "8201"
3. Press the "TRAN" key again (12)

### Place a call on/off hold

1. Press the Programmable key "New Call" (4) to place a call on hold
2. Press the Programmable key "Back" (4) to take a call off hold